


1 – VÉRIFICATION DU COLIS



Support technique

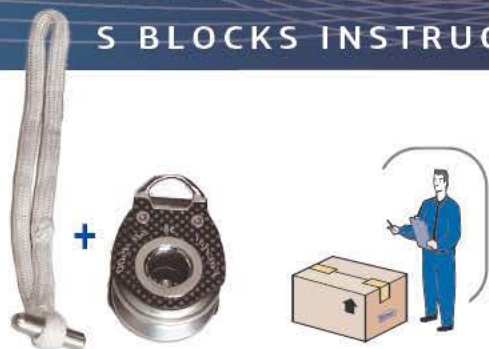

(PDF uniquement)

2 – CARACTÉRISTIQUES TECHNIQUES

POULIE MOUFLAGE SB					
Modèle	Réf. FX+/FXT/FAST	Ø RÉA	HAUTEUR (mm)	POIDS (g)	Référence
SB2500	FX+2500	50	77	281	43170102540
SB4500	FX+ 4500	57	84	341	43170104540
SB7000	FX+7000	64	93	429	43170107040

3 – OUVERTURE DE LA POULIE



4 – MONTAGE EN POULIE DE MOUFLAGE (SENS DE MONTAGE IMPÉRATIF)



5 – AUTRE UTILISATION (ACCROCHE PONT, ÉCOUTE,...)



6 – SÉCURISATION DU VERROUILLAGE (SI NÉCESSAIRE)




MAINTENANCE :

- Rincer les mécanismes régulièrement (sans pression excessive)



Notre service technico-commercial ainsi que l'ensemble des revendeurs Facnor se tiennent à votre disposition pour tout renseignement ou conseil : info@facnor.com

1 – BOX CONTENT

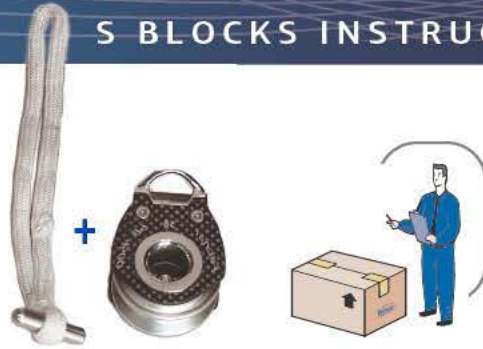

Technical support



(PDF only)

2 – TECHNICAL DATAS

SB SNATCH BLOCK- (Pivoting carbon cheeks)					
Model	FX+/FXT/FAST model	∅ Sheave (mm)	Height (mm)	Weight (g)	Reference
SB2500	2500	50	77	281	43170102540
SB4500	4500	57	84	341	43170104540
SB7000	7000	64	93	429	43170107040

3 – BLOCK OPENING



4 – FITTING A TWO-TO-ONE BLOCK (COMPULSORY INSTALLATION ON SWIVEL)



5 – OTHER FITTING (FOR EXAMPLE : DECK FITTING)



6 – SAFETY LOCK (IF NEEDED)



MAINTENANCE :

- Rinse the mechanisms after use.



Please do not hesitate to contact Facnor sales team (info@facnor.com) or agents if you have any queries :
info@facnor.com